



ALUMINUM RAILINGS

PRODUCT FEATURES


- · Aluminum one-piece welded construction
- 1½" diameter tube
- 42" high with mid-rail
- Corrosion resistant
- Non-magnetic
- Mill finish
- Mounting feet have 9/16" diameter holes for bolt-on field installation
- Mounting hardware not included
- Available in choices of 7 lengths, 2' through 8'
- Choose a combination of models for distances greater than 8'
- OSHA 1926. 1052(c)(5) compliant
- F.O.B. Croswell, MI
- Lead-time: 10 working days A.R.O.
- Terms: net 30 Days
- · Pricing subject to change without notice

WITHOUT TOE-BOARDS

RAILING LENGTH	MODEL NO.
2'	AR2
3'	AR3
4'	AR4
5'	AR5
6'	AR6
T'	AR7
8'	AR8

WITH 4" TOE-BOARDS

RAILING LENGTH	MODEL NO.
2'	AR2T
3'	AR3T
4'	AR4T
5'	AR5T
6'	AR6T
ľ	AR7T
8'	AR8T

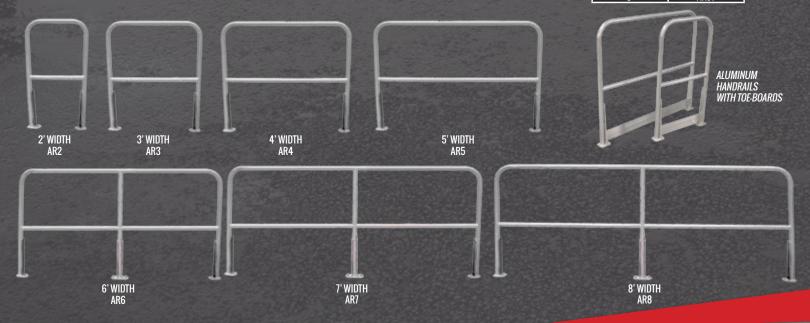



130 Seltzer Rd. Croswell, MI 48422 810-679-4400 • FAX 810-679-4510 TOLL FREE 800-5-LADDER 8 A.M. – 5 P.M. MON. THRU FRI. (EASTERN STANDARD TIME)